


# ideal lux | Lika Trimless



## DOWNLIGHT

Family of recessed rectangular modules in die-cast aluminum, painted black with polycarbonate reflector. Available in TRIM versions with frame, TRIMLESS with recessed edge for flush installation on plasterboard ceilings or ceiling version. Modules available with two, five or ten lenses. Specially designed to avoid glare (UGR <16), best for installation in OFFICES and SHOPS.

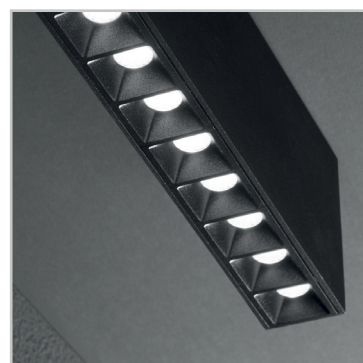

Code	244884
Item name	LIKA 10W SURFACE BK
Source	LED COB OSRAM
Power	10W
Driver included	KEGU
Driver available	No
Lumen	1100 Lm
MacAdam	SDCM 5
Beam	44°
CCT	3000K
CRI	≥90
UGR	<19
LED Life	30.000 h
Insulation class	Class II
IP	20
Material	Aluminum
Warranty	5 years
Net Weight	0,210 Kg
Volume	0,0008 m <sup>3</sup>
Base / Hole	13 x 3 cm

